


CT330 Container Door Lock Data Sheet

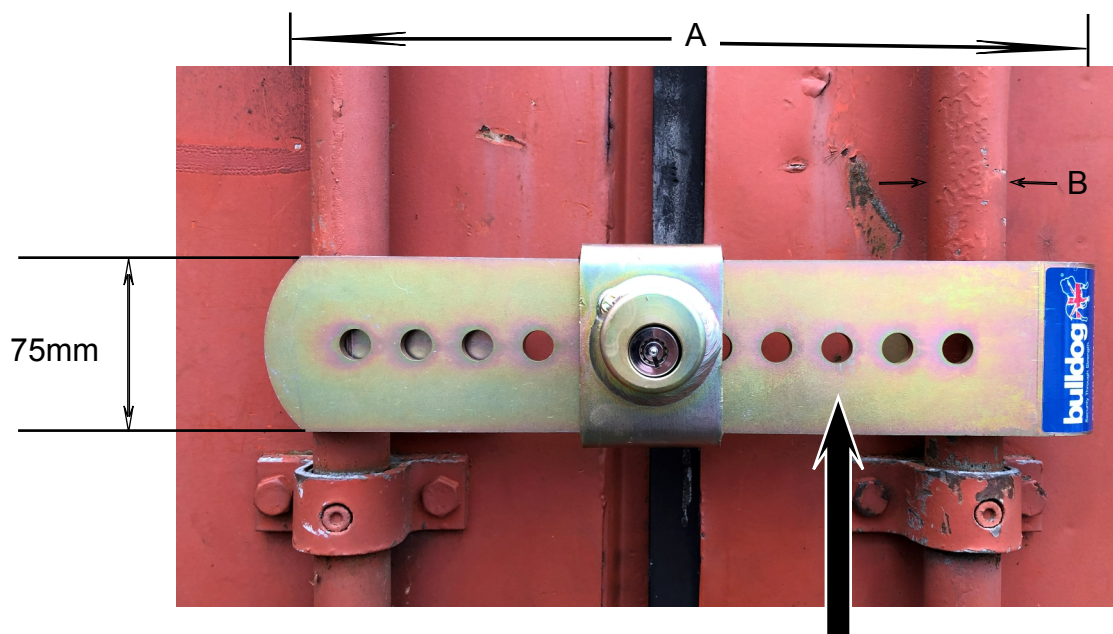

**TAMPER SEAL PASSES
THROUGH HOLE HERE.**

Features:

- Easily moved from container to container.
- Case hardened steel, 6mm thick x 75mm wide.
- Bulldog highly developed 10 pin plunge lock, anti drill centre pin. Can be locked without the use of the keys. Over one million possible key combinations.
- Prevents doors from opening by tying both together when fitted.
- Multi holes for varying distances between door bars.
A= Min Dist to Outside of Bars - 230mm B= Max bar diameter - 38mm
Max Dist to Outside of Bars - 460mm
- Minimum clearance between door bars and door is 6mm.
- Independently tested and approved by KIWA. Approval No. MP030422.
- Multiple locks can be supplied with the same key for fleet or multi user applications.
- Provision to fit tamper evident seal.
- Weight = 3.5kg

Bulldog Security Products Ltd

Units 1 - 4 Stretton Road, Much Wenlock, Shropshire, TF13 6DH.

Tel: 01952 728171 Fax: 01952 728117

Email: sales@bulldogsecure.com Web Site: www.bulldogsecure.com

Secured by Design



Police Preferred Specification